

B6000

More colors
new range



SIOEN sio-line®

SIDE CURTAINS • B6000

SIOEN® COATING DISTRIBUTION



1001 - 300cm (RAL-)



1003 - 300cm (RAL1014)



1018 - 300cm (RAL1018)




1021 - 300cm (RAL1021)



1024 - 300cm (RAL1003)




1025 - 300cm (RAL-)

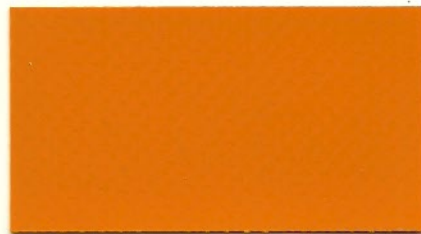


1049 - 300cm (RAL1007)




1059 - 300cm (RAL1032)

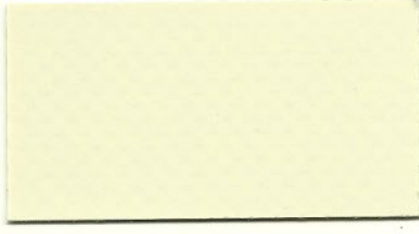


1622 - 300cm (RAL-)

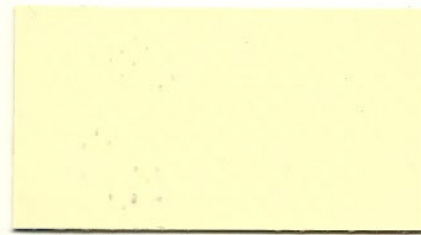

1623 - 300cm (RAL-)

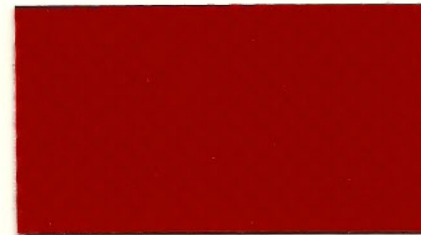


3001 - 300cm (RAL-)

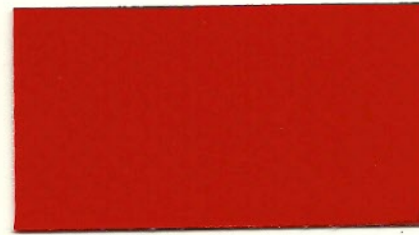

3002 - 300cm (RAL-)

B6000 PANAMA • SIDE CURTAINS

SIOEN

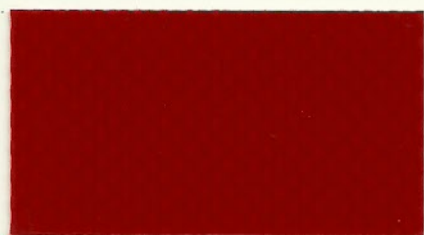

3015 - 300cm (RAL3002)




3016 - 300cm (RAL-)



3017 - 300cm (RAL-)



3018 - 300cm (RAL-)

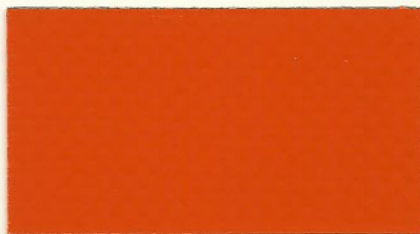


3021 - 300cm (RAL2008)



3056 - 300cm (RAL-)



3057 - 300cm (RAL4007)

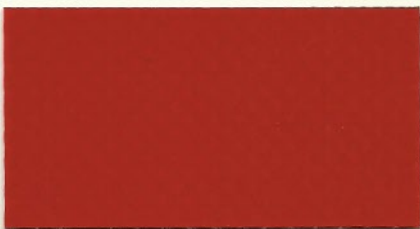

3105 - 300cm (RAL-)



5001 - 300cm (RAL-)



5003 - 300cm (RAL5012)



5004 - 300cm (RAL5013)




5007 - 300cm (RAL-)




SIOEN



5020 - 300cm (RAL-)

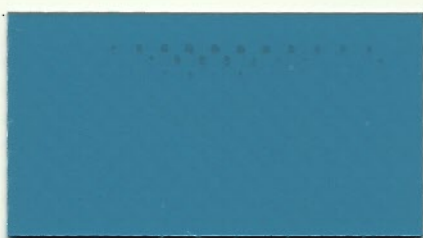

5023 - 300cm (RAL-)

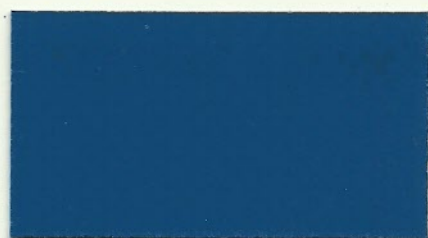

5025 - 300cm (RAL-)



5026 - 300cm (RAL-)



5027 - 300cm (RAL-)



5028 - 300cm (RAL-)




5029 - 300cm (RAL-)



5030 - 300cm (RAL-)



5031 - 300cm (RAL5010)

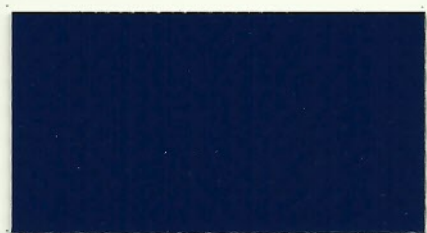


5032 - 300cm (RAL-)



5061 - 300cm (RAL-)



5063 - 300cm (RAL5002)

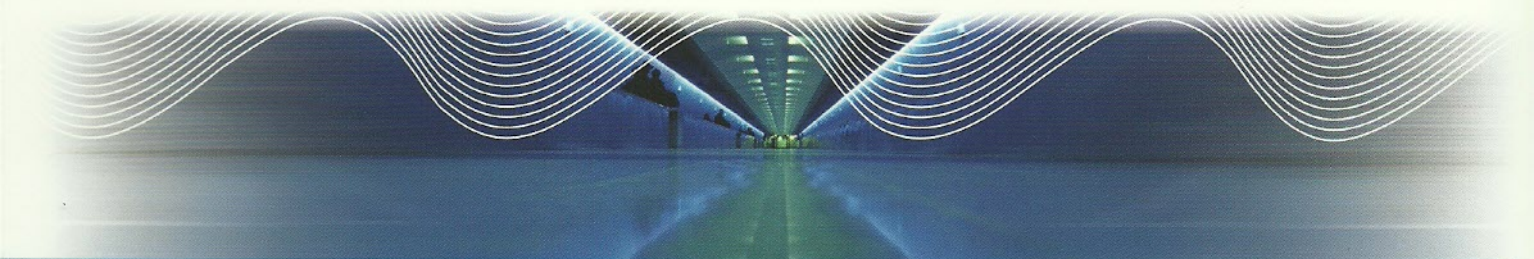

SICEN



5104 - 300cm (RAL5011)



5177 - 300cm (PMS273c)



6001 - 300cm (RAL-)



6002 - 300cm (RAL6001)



6027 - 300cm (RAL6018)



6028 - 300cm (RAL6005)



6036 - 300cm (RAL-)



6037 - 300cm (RAL-)



6038 - 300cm (RAL-)



6039 - 300cm (RAL-)




7001 - 300cm (RAL-)



7002 - 300cm (RAL7035)

FRET SNCF

SIOEN

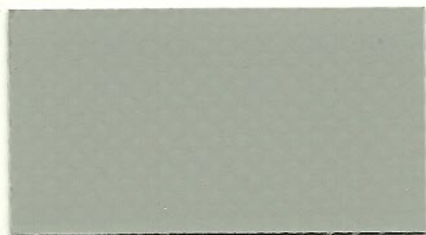


7003 - 300cm (RAL-)



7024 - 300cm (RAL-)



7060 - 300cm (RAL-)

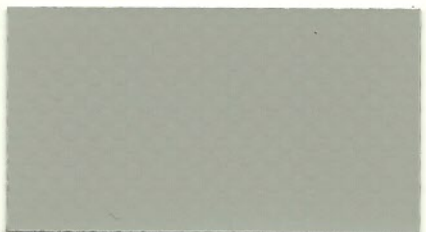


7071 - 300cm (RAL-)




7179 - 300cm (RAL-)




7244 - 300cm (RAL7043)

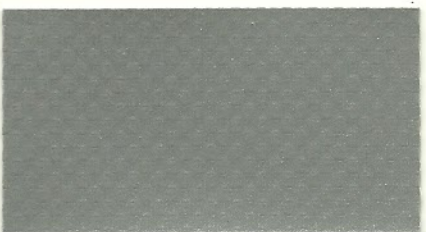

7500 - 300, 320cm (RAL9006)

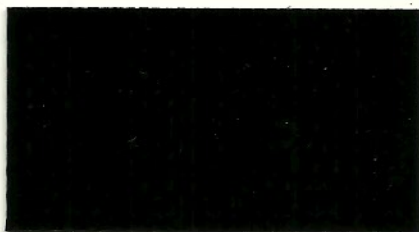

7999 - 300cm (RAL-)

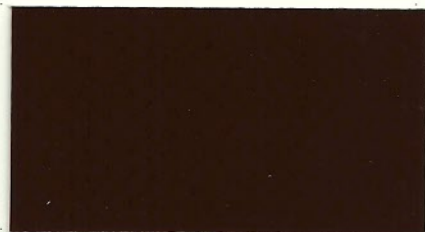

8020 - 300cm (RAL8017)



9002 - 285, 300, 320cm (RAL-)



9013 - 300cm (RAL9010)

Any other colour: min. 1000 LM.



P6808 - 300cm (BEPRINT STAAL)

SIOEN



B6000

weefsel/tissu/fabric Gewebe/tejido		100% PES 1100 dtex	
coating/enduction Beschichtung/revestimiento		PVC	
gewicht/poids/weight Gewicht/peso total		900 g/m²	DIN EN ISO 2286-2
vernis/lacquering/Lackierung/lacado		1/1	
kalender/calandre/Embossing/kalender		Glossy	
treksterkte résistance rupture breaking strength Höchstzugkraft resistencia a la ruptura	ketting/warp/chaîne Kette/urdimbre	4000 N/5cm	EN ISO 1421 meth 1
	inslag/weft/trame Schuß/trama	4000 N/5cm	
scheurweerstand résistance à la déchirure tear strength Weiterreißfestigkeit resistencia a la rasgadura	ketting/warp/chaîne Kette/urdimbre	600 N	DIN 53 363
	inslag/weft/trame Schuß/trama	500 N	
hechting/achérence/adhesion Haftung/adherencia		100 N/5cm	EN ISO 2411
temperatuurbestendigheid tenue à la température temperature resistance Temperaturbeständigkeit resistencia a la temperatura		-30 °C/+70°C	DIN EN 1876-2
lichtechtheid tenue à la lumière light fastness Lichtechtheit resistencia a la luz	(uitgezonderd wit en (semi-) transparant) (excepté en blanc et (semi-) transparent) (except white and (half-) transparent) (außer Weiß und (Semi-)transparent) (excepto blanco/(Semi-)transparente)	7-8	ISO 105 B02
onbrandbaarheid/inflammabilité flammability/Flammbarkeit/inflamabilidad		<100 mm/min	ISO 3795
toepassing application application Anwendung aplicación	schuifgordijnen rideaux coulissants side curtains Schiebeplanen cortinas laterales camión		

• Al onze technische gegevens zijn indicatief • Toutes nos caractéristiques techniques sont indicatives • All our technical characteristics are indicative •
• Alle technischen Daten sind indikativ • Las características técnicas están indicativas •

SIOEN